
CIMCO SOFTWARE





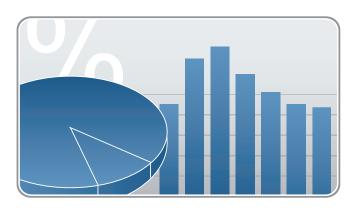

www.cimco.com

CIMCO Edit The Professional CNC program editor

+ 🔚 🕫 🚽			CIMCO Edit v8.0 - [C:\C	CIMCO\CIMCOEdit8\S	amples\l	SO MILL\2E	DEX2.NC]				
File Database Editor	r NC Functions Backplot File Compare Transmission DNC-Max Client CNC-Calc Window - Help & X											
	Save Print Global As	ISO Milling	▼ Gopy Select Al Gopy Select Al Gopy Select Al Dundo Paste ♥ Redo Fall Fall	Append File	Find	€ Find <u>P</u> rev ♥ Find <u>N</u> ext ₩ <u>R</u> eplace		to Line/B Number Find		View P	Go to Previous Go to Next Toggle Indicators Bookmarks	
2DEX2.NC											4 Þ x	
NC-Assistant	97 N282X14	.824Y-16.443R14.	2								4 Þ x	
	98 N284X22	.099Y1.337R14.2										
escription: 303 Counterclockwise arc move	99 N286X12.	.733Y18.111R14.2										
	100 N288X-6.	.221Y21.247R14.2										
< coordinate:	101 N290X-20	0.49Y8.383R14.2										
Y coordinate:	102 N292G1Z5	5.F10000.										
Z coordinate:	103 N294G0Z1	100.										
	104 N296M5											
Arc radius (set negative for arc sweep	105 N29 106 N30		G03 Counterclockw	ise arc move								
		am. Description			Value	Default	Min. I	Max.				
	108 (2 X	X coordinate			-5.996							
	109 N30 Y	Y coordinate			24.412		-					
	110 N30 Z											
Modify	111 N30 R 112 N31 R		ve for arc sweep greater t	han 180 degrees)	1.02							
Cycles / Macros	112 N31											
)efault 🗸		D0X-6.442Y23.04F							,			
Program Start and End		-5.996Y24.412R1.										
Tool change		-6.064Y24.546R12	.3									
Program comment					117 N320G1x-7.758y27.973							
	118 N322X-7.967Y23.991											
600 Rapid move 601 Linear move	119 N324G3X-	-7.002¥22.919R1.										
300 Rapid move 301 Linear move 302 Clockwise arc move	119 N324G3X- 120 N326G1G4	-7.002¥22.919R1. 40x-5.984¥22.865										
300 Rapid move 301 Linear move 302 Clockwise arc move 303 Counterclockwise arc move	119 N324G3X- 120 N326G1G4 121 N328G0Z5	-7.002¥22.919R1. 40x-5.984¥22.865 50.										
300 Rapid move 301 Linear move 302 Clockwise arc move 303 Counterclockwise arc move 304 Dwell	119 N324G3X- 120 N326G1G4 121 N328G0Z5 122 N330X-6.	-7.002¥22.919R1. 40x-5.984¥22.865 50. .194¥22.612										
000 Rapid move 201 Linear move 202 Clockwise arc move 303 Counterclockwise arc move 304 Dwell 307 Hypothetical axis interpolati	119 N324G3X- 120 N326G1G4 121 N328G025 122 N330X-6. 123 N332Z10.	-7.002Y22.919R1. 40x-5.984Y22.865 50. .194Y22.612										
000 Rapid move 001 Linear move 002 Clockwise arc move 003 Counterclockwise arc move 004 Dwell 007 Hypothetical axis interpolati 009 Exact stop check for one b	119 N324G3X- 120 N326G1G4 121 N328G025 122 N330X-6 123 N332Z10 124 N334G1Z-	-7.002Y22.919R1. 40x-5.984Y22.865 50. .194Y22.612 -5.F200.	i									
100 Rapid move 101 Linear move 102 Clockwise arc move 103 Counterclockwise arc move 104 Dwell 107 Hypothetical axis interpolati 109 Exact stop check for one b 11 Data setting mode (Standa	119 N324G3X- 120 N326G1G4 121 N328G025 122 N330X-6 123 N332Z10 124 N334G1Z- 125 N336G411	-7.002Y22.919R1. 40x-5.984Y22.865 50. .194Y22.612 -5.F200. D0x-5.303Y23.108	;									
500 Rapid move 301 Linear move 302 Clockwise arc move 303 Counterclockwise arc move 304 Dwell 307 Hypothetical axis interpolati 309 Exact stop check for one b 310 Data setting mode (Standa 311 Data setting mode cancel	119 N324G3X- 120 N326G1G4 121 N328G025 122 N330X-6. 123 N332Z10. 124 N334G1Z- 125 N336G411 126 N338G3X-	-7.002Y22.919R1. 40x-5.984Y22.865 50. .194Y22.612 -5.F200. D0x-5.303Y23.108 -4.908Y24.496R1.	; 8F400. 02									
000 Rapid move 001 Linear move 002 Clockwise arc move 003 Counterclockwise arc move 004 Dwell 005 Hypothetical axis interpolati 005 Exact stop check for one b 010 Data setting mode [Standa 011 Data setting mode cancel 015 Folar coordinate mode can	119 N324G3X- 120 N326G1G4 121 N328G0Z5 122 N330X-6 123 N332Z10 124 N334G1Z- 125 N336G411 126 N338G3X- 127 N340G2X-	-7.002Y22.919R1. 40X-5.984Y22.865 50. .194Y22.612 -5.F200. D0X-5.303Y23.108 -4.908Y24.496R1. -6.305Y29.138R11	; 8F400. 02									
GOD Rapid move GOD Linear move GOD Linear move GOD Colockwise arc move GOD Colockwise arc move GOD Hypothetical axis interpolati GOD Public ateling mode GOT Hypothetical axis interpolati GOD Data setting mode Glanda GIT D bata setting mode cancel GIT 5 Polar coordinate mode GIT 6 Polar coordinate mode	119 N324G3X- 120 N326G164 121 N328G024 122 N330X-6. 123 N332Z10. 124 N334G12- 125 N336G411 126 N338G3X- 127 N340G2X- 128 N342G3X-	-7.002Y22.919R1. 40x-5.984Y22.865 50. .194Y22.612 -5.F200. D0x-5.303Y23.108 -4.908Y24.496R1. -6.305Y29.138R11 -8.7Y29.11R1.2	; 8F400. 02									
G00 Rapid move G01 Linear move G02 Clockwise arc move G03 Counterclockwise arc move G04 Pupotherical axis interpolati G09 Exact stop check for one b G10 Data setting mode (Standa G11 Data setting mode cancel G15 Polar coordinate mode G16 Polar coordinate mode G17 XY plane specification	119 N324G3X- 120 N326G144 121 N328G25 122 N330X-6. 123 N332Z10. 124 N334G12- 125 N336G411 126 N338G3X- 127 N340G2X- 128 N342G3X- 129 N344G1X-	-7.002Y22.919R1. 40X-5.984Y22.865 50. .194Y22.612 5.F200. D0X-5.303Y23.108 -4.908Y24.496R1. -6.305Y29.138R11 -8.7Y29.11R1.2 -8.7Y29.11R1.2	1F400. 02 3									
G00 Rapid move G01 Linear move G02 Clockwise arc move G03 Counterclockwise arc move G03 Counterclockwise arc move G04 Hypothetical axis interpolati G05 Exact stop check for one b G10 Data setting mode (Standa G11 Data setting mode (Standa G16 Potar coordinate mode can G16 Potar coordinate mode can G16 Potar coordinate mode Can G16 Potar coordinate mode G17 ½7 plane specification G19 ½2 plane specification	119 N324G3X- 120 N326G104 121 N328G025 122 N330X-6. 123 N332Z10. 124 N334G12- 125 N336G41I 126 N338G3X- 127 N340G2X- 128 N342G3X- 129 N344G1X- 130 N346G3X-	-7.002Y22.919R1. 40x-5.984Y22.865 50. .194Y22.612 .5.F200. D0x-5.303Y23.108 -4.908Y24.496R1. -6.305Y29.138R11 -8.7Y29.11R1.2 -8.997Y23.453 -8.032Y22.381R1.2	; 02 3									
GOT Rapid move GOT Linear move GOT Linear move GOZ Clockvise arc move GOZ Clockvise arc move GOT Hupothetical exis interpolati GOT bupothetical exis interpolati GOT bata setting mode (Standa GIT Data setting mode cancel GIT 5 Polar coordinate mode can GIT 6 Polar coordinate mode GIT X/Y plane specification GIT8/XZ plane specification	119 N324G3X- 120 N326G104 121 N328G025 122 N330X-6. 123 N332Z10. 124 N334G12- 125 N336G41I 126 N338G3X- 127 N340G2X- 128 N342G3X- 129 N344G1X- 130 N346G3X-	-7.002Y22.919R1. 40x-5.984Y22.865 50. .194Y22.612 -5.F200. D0x-5.303Y23.108 -4.908Y24.496R1. -6.305Y29.138R11 -8.7Y29.11R1.2 -8.937Y23.453 -8.032Y22.381R1. 40x-7.013Y22.238	; 02 3									

The Professional CNC program editor

As a CNC programmer or machinist on the shop floor responsible for creating or editing CNC programs you need a professional tool that is fast and flexible.

CIMCO Edit is the most popular CNC program editor on the market. With over 100,000 licenses distributed, CIMCO Edit is the editor-of-choice for professionals who demand a full-featured and reliable, cost-effective professional editing and communication tool. CIMCO Edit provides a comprehensive set of editing tools that meet the demands of modern CNC program editing.


CIMCO Edit includes CNC code specific options such as line numbering/renumbering, character handling, and XYZ range finder. It also features math functions including basic math, rotate, mirror, tool compensation, and translate. CIMCO Edit offers all the functions expected from an editor including drag-and-drop text editing. Best of all, CIMCO Edit is completely configurable and is easily adapted to any existing CNC program editing environment.

Every aspect of the latest CIMCO Edit is new, from the multi-pane tabbed layout to the dynamic toolbars and menus. CIMCO Edit includes new and powerfull GUI, improved file compare utility, graphical backplotter, NC-Assistant, and more.

NC-Assistant


The NC-Assistant makes editing NC code faster and easier than ever. Point at any M or G code and the NC-Assistant will identify the code allowing you to modify values using an interactive interface linked to the CNC code. Input the desired values for any register and the NC-Assistant updates the CNC code automatically. CIMCO Edit features a fast and fully configurable side-by-side file compare, allowing the user to quickly identify CNC program changes. The file compare identifies changed and deleted / inserted lines, but ignores trivial format changes like block re-numbering and spacing. Differences are displayed one line at a time, all at once, or printed side-by-side for offline review

The NC-Assistant tool allows you to quickly insert and edit complex cycles and operations. CIMCO Edit includes built-in cycles and macros for the most common operations such as program start, program stop, and tool change. You can also record or create custom cycles and macros for the operations most common to your own specific setups and applications.

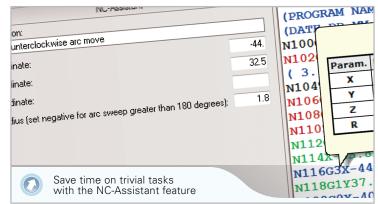


Graphical Backplotter

The 3D Mill / 2D Lathe backplotter handles your 3-axis mill and 2-axis lathe CNC programs with step and continuous forward and reverse plotting. Edit the CNC program and the update is automatically reflected in the plot. Analyze the plot with dynamic zoom, pan, rotate, and measuring functions. CIMCO Edit supports 3D graphical backplotting, stock, and final part verification in solids.

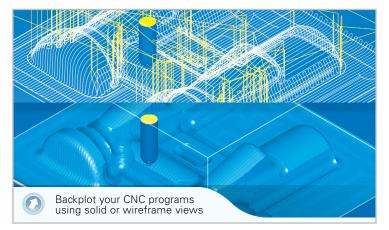

Intelligent File Compare

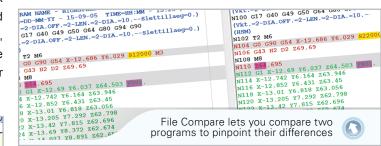

CNC Communications and DNC

CIMCO Edit includes DNC capabilities for reliable RS-232 communications with a variety of CNC controls. With the DNC option you can send and receive CNC programs to multiple machines simultaneously from inside CIMCO Edit.


113 N312G12-5.1 114 N31 AGA1DOX 115 N31 Transmit		?
an 180 116 N31 Transfer sta 117 N32 RX 118 N32 TX 119 N32 TX 119 N32 RTS 120 N32 CTS 121 N32 DTR 122 N33 DT	Machine: C:\CIMCO\CI	

Support for Mazatrol files

CIMCO Edit comes with support for viewing Mazatrol Program files directly in the editor instead of on the Mazak Control in the workshop. Quickly verify and review program changes with Mazatrol file-compare.

w Save ' ISO Milling a Cog	/ Gilde Land		umber Find 4 b X
ost Bont File Type File File Type S2DEXINC'/20DEXIC' (Butons Logy & GAUMARX & GAUMARX) () (Size 34 Blocks) M640M O. MAT INITIAL-Z ATC MODE D. CEN STL 20.	OFF *	FLAG PITCH-X x Z C	PITCH-Y *
	R BTM RAD k 5 * H-Y TYPE ZE	View Maza	

CIMCO CNC-Calc A basic CAD/CAM for the shop floor

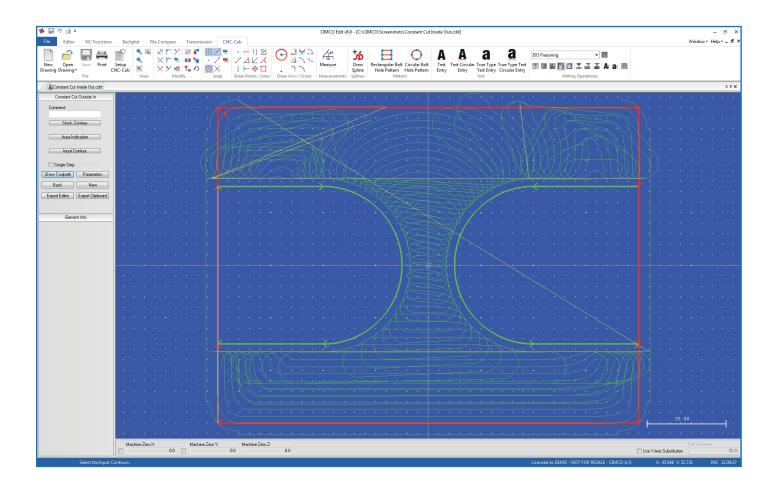

Designed for usability and productivity

CIMCO CNC-Calc is an add-on for CIMCO Edit that enables programmers on the shop floor to draw 2D geometrical contours, lay out toolpaths for mill and lathe, and simulate the resulting NC-program. CNC-Calc is a great tool for the operators and toolmakers on the shop floor who are not trained in working with an advanced CAD/CAM system. For them, CNC-Calc can help increase productivity and assist in the day-to-day NC-programming. For a small company it can be the first step into the CAD/CAM world.

CIMCO CNC-Calc is designed for ease-of-use and enables you to draw contours fast and easily. It features common functions for drawing lines and circles in relation to the coordinate system and/or existing geometry. Functionality ranges from the plain "horizontal line"


to the complex "circle tangent to three elements". It includes advanced trimming capabilities and an easy point and click approach to laying out CNC toolpaths.

CIMCO CNC-Calc also imports DXF files. From DXF it is possible to generate toolpaths for lathes and mills, such as ISO and Heidenhain conversational programming. Other features include generation of user-defined compensation types like computer, controller, wear, and reverse wear.

With CIMCO CNC-Calc being an integrated part of CIMCO Edit it is an easy task to view, edit, and simulate generated toolpaths. This enables you to validate your program and thereby optimize the use of machine resources.


2D Drawing Capabilities

CIMCO CNC-Calc is easy to learn and a great tool for drawing simple 2D contours. However, the comprehensive set of available functions in CNC-Calc also makes it suitable for handling more complex geometrical drawings. Drawing functions in CNC-Calc include advanced trimming of elements, easy creation of fillets, full support for transformations, many options for snapping to elements, and easy creation of both rectangular and circular bolt hole patterns.




Backplot and cycles/macros

Since CNC-Calc is an add-on for CIMCO Edit, all functionality of the editor can be seamlessly used. This includes the built-in 3D Mill / 2D Lathe backplotter which handles your 3-axis mill and 2-axis lathe CNC programs with step and continuous forward and reverse plotting. Further, the built-in cycles and macros for common operations like program start, program stop, and tool change are provided. You can also record or create custom cycles and macros for the operations most common to your own specific setups and applications.

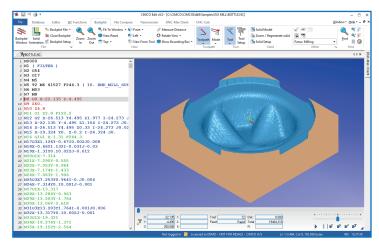

Strategies for 2D Milling and Turning






Milling

- Facing
- Contouring
- Pocket
- Drilling
- Thread Milling
- Letter Milling

Turning

- Roughing
- Facing
- Finishing
- Grooving
- Thread (ID, OD)
- Cutoff

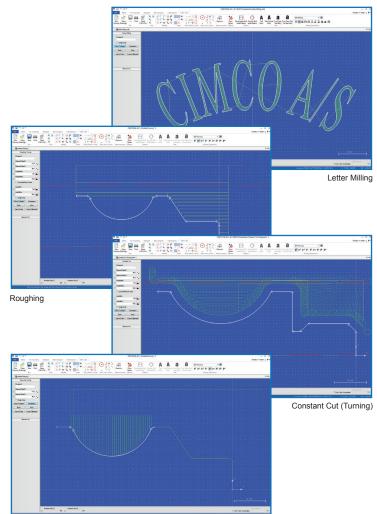

Grooving

CIMCO NC-Base Professional CNC program management

Find programs # R0001 SAMPLE PART. DWS1001A1 PN01-1001 # R0003 SAMPLE PART. DWS1001A1 PN01-1002 # R1003 SAMPLE PART. DWS1003A1 PN01-1003 # R1004 SAMPLE PART. DWS1003A1 PN01-1003 # R1005 POCKETERAT. DWS1005A1 PN01-1003 # R1005 POCKETERAT. DWS1005A1 PN01-1005 Duswing number: # R1004 SAMPLE PART. DWS1005A1 Duswing number: # R1005 POCKETERAM. DWS1005A1 Duswing number: # R1006 Fance 0MR100 Fance 0MR100 # R1006 PARTLEPART. DWS1005A1 PN01-1005 # R1007 SAMPLE PART. DWS1005A1 PN01-1006 # R1008 SAMPLE PART. DWS1005A1 PN01-1007 # R1008 SAMPLE PART. DWS1005A1 PN01-1006 # R1008 SAMPLE PART. DWS1005A1 PN01-1006 # R1008 SAMPLE PART. DWS1005A1 PN01-1006 # R1008 SAMPLE PART. DWS1005A1 PN01-1007 # R1008 SAMPLE PART.	k 🔚 🔊 🎒 Ŧ	CIMCO Edit v8.0 - [NC-Base Explorer - ADMIN]	
Add copy logan back and find program fields and find program fields and field field field field	File Database	r <u>N</u> C Functions Backplot File Compare Transmission DNC-Max Client CNC-Calc <u>Window Help</u>	8
Find programs Program Program<	•	24 Locked Find rs* , Deleted Info* , Program Program Program Program - Program - Program - Program - Program - Program - File(s)* , Lock Accept Reject Add Change Comment Status Send Receive Restore Add Customer Log List* Password	
A Find programs # R100 SAMPLE PART DWG1001A1 PM01-1001 # R100 SAMPLE PART DWG1001A1 PM01-1002 # R100 SAMPLE PART DWG1001A1 PM01-1003 # R100 SAMPLE PART DWG1001A1 PM01-1005 # R100 Popmenfie Fauc MNTeM Fauc MNTeM # R100 Sampe Fauc MNOHer # R1005 SAMPLE PART DWG1005A1 # R100 SAMPLE PART DWG100A1 PN01-1005 # R1001 Sampe Fauc MNOHer # R1005 SAMPLE PART DWG100A1 PN01-1005 # R1001 WS1001A1 PN01-1007 # R1001 WS100TA1 PN01-1005 # R1001 WS100TA1 PN01-1007 # R1001 WS100TA1 PN01-1001 # R1001 WS100TA1 PN01-1001 # R1001 WS100TA1 PN01-1001	🙆 NC-Base	Þ	⊳×
Program: # R1002 SAMPLE PART _ DVG1002A1 PN01-1002 # R1004 SAMPLE PART _ DVG1003A1 PN01-1003 # R1005 SAMPLE PART _ DVG100A1 PN01-1003 # R1005 PARCE DVG10AA1 PN01-1003 # R1007 SAMPLE PART _ DVG100AA1 PN01-1005 Description Image: R100. Foreign Hill Foreign Million Image: R100. Sample Part _ DVG100AA1 PN01-1005 Description Image: R100. Sample Part _ DVG100AA1 PN01-1005 Image: R100. Sample Part _ DVG10AA1 PN01-1005 Image: R100. Image: R100. Image: R100. Sample Part _ DVG10AA1 PN01-1005 Image: R100. Image: R100. Image: R100. Image: R100. Sample Part _ DVG10AA1 PN01-1005 Image: R100. Image: R100. Image: R100. Image: R100. Image: R1003 Sample Part _ DVG100AA1 PN01-1003 Image: R100.	🔍 Find programs		_^
Patrumbe: Patrumbe:	Program:	-R1002 SAMPLE PART DWG1002-A1 PN01-1002	
Drewing number: R 100. Pogent file Fanuc 0M/R100. Tool Lat Fanuc 0M/R100. Tool Lat Fanuc 0M/R100. Tool Lat Fanuc 0M/R100. Tool Lat Fanuc 0M/R100. Fanuc 0M/	Part number:	-R1004 SAMPLE PART DWG1004-A1 PN01-1004	
Description: Machine: Statu:	Drawing number:	In R100 Program file Fanuc 0M/R100	
Lutomer: Image: Fanuc 0M/Other Statur: Image: Fanuc 0M/Other Image: Fanuc 0M/Other DWG1009A1 Image: Fanuc 0M/R1003.NC Size: 86.596 / 220m	Description:	3 R100 Setup Sheet Fanuc 0M/Setu	
*-R1007 SAMPLE PART DWG1007-A1 PN01-1007 tatu: *-R1008 SAMPLE PART DWG1008-A1 PN01-1008 *-R1008 SAMPLE PART DWG1008-B1 R PN01-1009 ** ** *-R1010 WABBIT HUNT DWG1010B1 R3 PN01-1010 ** *-R1011 KNOB OR SWIT DWG1010B1 R3 PN01-1010 ** *-R1011 KNOB OR SWIT DWG1011A1 R3 PN01-1010 ** *-R1011 KNOB OR SWIT DWG1011A1 R3 PN01-1010 ** *-R1011 KNOB OR SWIT DWG1003-NC Size: 86.596 / 220m Modified: 11-08-2004 15:24:39 Ol1003 N00100 (PART : PN01-1003) N00200 (DLSC: SAMPLE PART 1003) N00200 (DLSC: SAMPLE PART 1003) ** ** ** N0040 (CUST: SUPER PARTS INC.) ** ** ** N0050 G341 N0060 ** ** ** N0080 G45 T1 (BALL ENDMILL DIA 6 OFF 46) ** ** ** N0080 G45 T1 (BALL ENDMILL DIA 6 OFF 46) ** ** ** N0010 GX 50.25 Y24.1966 ** ** ** <td< td=""><td></td><td></td><td></td></td<>			
No Search R1009 ELEPHANT DWG1009-B1 R PN01-1009 Advanced search R1010 WABBIT HUNT DWG1010-B1 R3 PN01-1010 Advanced search Fanuc 0M/R1003.NC Size: 86.596 / 220m Modified: 11-08-2004 15:24:39 Created: 11-08-2004 15:24:39 O1003 N0010 (PART: PN01-1003) N0020 (DRAW: DWG1003-A1) Image: Created: 11-08-2004 15:24:39 Image: Created: 11-08-2004 15:24:39 N0030 (DESC: SAMPLE PART 1003) N0030 (DESC: SAMPLE PART 1003) Image: Created: 11-08-2004 15:24:39 Image: Created: 11-08-2004 15:24:39 N0050 G341 N0050 G341 N0050 G341 N0050 G341 Image: Created: 11-08-2004 M3 N0050 G45 T1 (BALL ENDMILL DIA 6 OFP 46) N0090 G9 PA1 S10000 M3 Image: Created: 11-08-2004 M3 Image: Created: 11-08-2004 M3 N0100 C0 X550.25 Y24.1966 N0110 Z25. M7 Image: Created: 11-08-2004 M3 Image: Created: 11-08-2004 M3			
Search R1011 KNOB OR SWIT DWG1011A1 R3 PN01-1001 Advanced search Fanuc 0M/R1003.NC Size: 86.596 / 220m Modified: 11-08-2004 15:24:39 Created: 11-08-2004 15:24:39 O1003 N0010 (PART : PN01-1003) N0020 (DRAW : DWG1003-A1) Image: Size: 86.596 / 220m Modified: 11-08-2004 15:24:39 Image: Size: 86.596 / 220m			
Fanue OM/R1003.NC Size: 86.596 / 220m Modified: 11-08-2004 15:24:39 Created: 11-08-2004 15:24:39 O1003 N0010 (PART: PN01-1003) Image: Control of the second sec			~
N0030 (DESC:SAMPLE PART 1003) N0040 (CUST:SUPER PARTS INC.) N0050 G341 N0060 G99 M10 N0070 M11 {XYZ} N0080 G45 T1 (BALL ENDMILL DIA 6 OFF 46) N0090 G99 PA1 S10000 M3 N0100 G0 X50.25 Y24.1966 N0110 Z25. M7	Advanced search	nuc OM/R1003.NC Size: 86.596 / 220m Modified: 11-08-2004 15:24:39 Created: 11-08-2004 15:24:39	
N0120 Z1.05 M8		N0010 (PART:PN01-1003) 10020 (DRAW:DWG1003-A1) 10030 (DESC:SAMPLE PART 1003) 10040 (CUST:SUPER PARTS INC.) 10050 G341 10060 G99 M10 10070 M11 (XYZ) 10080 G45 T1 (BALL ENDMILL DIA 6 OFF 46) 10090 G99 PA1 \$10000 M3 10100 G X50.25 Y24.1966 10110 Z25. M7 10120 Z1.05 M8	

Information Management

Management of part programs and associated production documents is often a time-consuming task for CNC programmers and operators. CIMCO NC-Base takes care of that job and goes one step further. By providing a management and search and editing environment that are integrated and highly flexible, programmers and operators are guaranteed to work more effectively.


Achieving product and quality goals today requires that the correct information and data get to the right individuals and equipment as efficiently as possible. CIMCO NC-Base is the CNC program management tool that allows you to organize and manage your CNC programs and related production documents most effectively through the use of a reliable and fast SQL relational database.

CIMCO NC-Base is production centric, designed to be used by people in the programming department and on the shop floor. With NC-Base, CNC programmers and production staff can assemble virtual folders containing all the necessary data used by machinists, operators, quality staff, and others who are responsible for finished parts.

Why just send CNC programs to the shop floor when you can also provide setup sheets, tool lists, images, and other vital information required to manufacture parts? This information may be accessed from PCs running the NC-Base Client, or printed out for manual distribution. CNC operators can access and update information in NC-Base directly from the CNC control, or any PC on the shop floor. Either way, NC-Base helps ensure the right part gets made right every time.

Storage and Retrieval

Effective storage requires an organized framework for managing and accessing vital production information. Using industry standard relational SQL databases like Microsoft SQL and MySQL, CIMCO NC-Base provides a fast, flexible, and reliable system for all your production information.

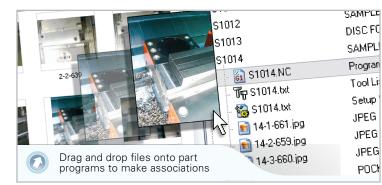


Documentation

Associate all types of production data with your CNC programs to minimize mistakes and scrap. You may associate files created outside CIMCO Edit, such as tool lists, setup sheets, inspection notes, etc., or have them created automatically from data contained in your CNC program. You may also launch external applications for the viewing or editing of all file types.

Version Control

CIMCO NC-Base features a comprehensive, yet easy to use, version control system that automatically tracks any changes made, not only to the CNC programs, but also to associated production documentation. Every version of a file is stored in the system, along with information about when the change was made, who made it, and why it was made. The operator can at any time create a new version or restore an older version. Using the integrated compare function, different versions can be quickly compared side by side.

Ē	ADMIN	13:04:00	3	Program
	ADMIN	13:54:32	3	Program
		13:53:37	3	Program
	ADMIN	13:53:04	ž	Backup
	ADMIN	13:53:04	2	Program
	ADMIN	13:51:24	2	Program
	ADMIN	13:51:16	2	Program
	ΔDMIN	15.51.15	4	_
		tomatically track changes made to ograms and associated documentation	2	Backup
	y pro		4	New D

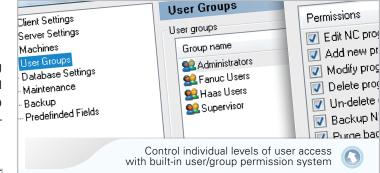


User Management

Controlling who can access and modify information is a critical component in any information management system. CIMCO NC-Base achieves this by using a highly flexible user/group permission system that allows the administrator to specify who is allowed to view, modify, approve files, etc.

System Integration

CIMCO NC-Base is fully integrated with CIMCO DNC-Max, our flagship CNC networking solution, allowing operators to request and retrieve CNC programs or save "as-run" CNC programs directly from the CNC control or NC-Base client.

CIMCO NC-Base integrates seamlessly with most CAD/CAM applications. Using the auto import function, programs generated in the programming department are automatically imported into the database. Existing ERP/PDM systems can extract data directly from the SQL database. Program information can also be exported to text files, MS Excel spreadsheets, etc.

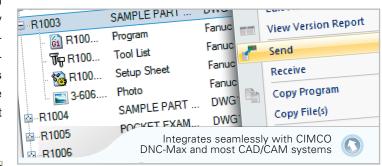

Automated backup

Using the NC-Base backup server, a complete backup of all the information in the database, including part programs, associated production documentation, etc., is automatically performed every day. In case of a backup failure, system administrators are automatically notified by e-mail

CIMCO DNC-Max **Professional CNC communication**

ort			Status			Time F	1-		
			Status			Time F	lle		
Lathe Group									
문 CTX 30			ldle						
🚰 Haas TL-15			Idle	_					
→ Okuma LB35			Send manual file contents			0:00:55 C	:\NC-Data\Okuma I	Lathe VIN STD S90	MAN D22.NC
₩ Puma TT1800SY			Idle Receive auto file contents	_		0:00:47 1	224		
	- TUJ		Receive auto file contents			0:00:47 1	234.NC		
Mill Group									
🚟 Haas V			Idle						
Be Hermle			Idle						
물 Mazak			Idle						
Micron			Idle						
- ⁻			Idle Send manual file contents			0.00.55	:\NC-Data\Roeders		
	S HAPOUU		Send manual file contents			0:38:00 0	: \INC-Data \Roeders	RAP300/LEFIOV	ER.NC
Tool Room									
🚰 Agie Ev			Idle						
⇐ Haas To	oolroom Mill		Receive auto file contents			0:00:52 L	EFT-R44.nc		
Send	Receive	Hide Tabs	ן		Т	ransfer Status	Send/Receive	Log	Terminal
Joind			J				Jendyfreceive	Log	Tenninar
	File name:								
RX RX		ders RXP500\LEFTOVE	ER.NC						
	Current Line:			1.063	Program name:				
BX		L			Elapsed Time:				0.00.10
TX RTS				20.584					0:00:48
TX 🗖	Bytes Sent:					1:			0:38:55
TX RTS					Time Remaining	·			0
TX RTS CTS	Bytes Sent:				Lime Remaining Errors:				
TX RTS CTS DTR DSR	Bytes Sent: Lines Received:			428/44					Send manual
TX RTS CTS DTR DSR XOff	Bytes Sent: Lines Received: Bytes Received:			428/44	Errors:				Send manual
TX RTS CTS DTR DSR	Bytes Sent: Lines Received: Bytes Received:			428/44	Errors:				Send manual

Reliable CNC Communication

CIMCO DNC-Max is the latest version of the most trusted CNC communication software on the market and provides end-to-end functionality designed to make every aspect of CNC communications more reliable and efficient. From its highly adaptable remote request and auto-receive to its advanced client/server architecture, DNC-Max continues to be the software solution of choice.

DNC-Max is designed to be the complete DNC solution for all your CNC equipment. In addition to standard Fanuc/Haas style controls DNC-Max includes the most comprehensive support for Heidenhain, Mazak, Fagor, etc.


DNC-Max works with off-the-shelf, industry standard RS-232 serial communications hardware, including Ethernet and Wireless serial device servers, traditional card based hardware, and existing legacy hardware.

Whether you set up your first system or you replace an existing system, the DNC application you choose must be compatible with your data DNC-Max eliminates the need to update all your existing NC programs.

File transfers, port monitoring and system administration are performed in a clean, intuitive client/server interface. This is part of the system's intelligent, solution-driven design

The Right Tool for the Job

CIMCO DNC-Max is the only choice for customers who demand performance, flexibility, and reliability. Whether your solution is for a small shop with a few CNCs or a corporate solution for hundreds of machines in multiple remote facilities, DNC-Max is the proven solution.

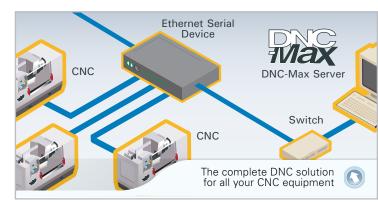


The DNC-Max Server

The DNC-Max server is the DNC engine responsible for all communications-related activities. Users can choose to run the DNC-Max Server as a service or as an application. This is the core component of DNC-Max.

The DNC-Max Client

The DNC-Max client is the application used for local or remote file transferring, port monitoring, and port management. The DNC-Max Client can access one or more DNC-Max Servers across a LAN, WAN, or even the Internet

B Haas TL-15	Send manual file content
→ Okuma LB35 Puma TT1800SY	Idle Receive auto file conter
⇔ Star SR-10J	
🖃 Mill Group	Idle
🚟 Haas VF-4	Idle
Hemle C50U	Idle
Mazak V-515	The DNC-Max Client provides Comprehensive system information

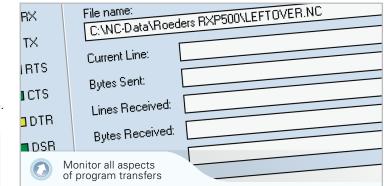



Global

Improved Windows User Interface Expanded Administration Capabilities Enhanced Remote Server Config License Server Support Remote CIMCO Support Client

Protocols

More Remote Request Options Directory Listing Wildcard Support More Directory List Formats/Filters Device Server Port Monitoring

The DNC-Max Server

System Backup/Restore Serial Device Server Speed Booster Global Port Settings Export Utility Enhanced NC-Base Integration Enhanced Data Collection Support

The DNC-Max Client


Improved UI Customization User Proximity UI Modes Port Group Configuration DAQ Device Setup and Configuration Improved Remote Server Access Updated Pocket PC Client

More than 100 other additions and enhancements.

Extending the Power of DNC-Max

CIMCO DNC-Max integrates with CIMCO NC-Base for a complete CNC program management solution, and CIMCO MDC-Max for machine data collection and shop floor monitoring.

CIMCO DNC-Max Wireless A turnkey wireless DNC system

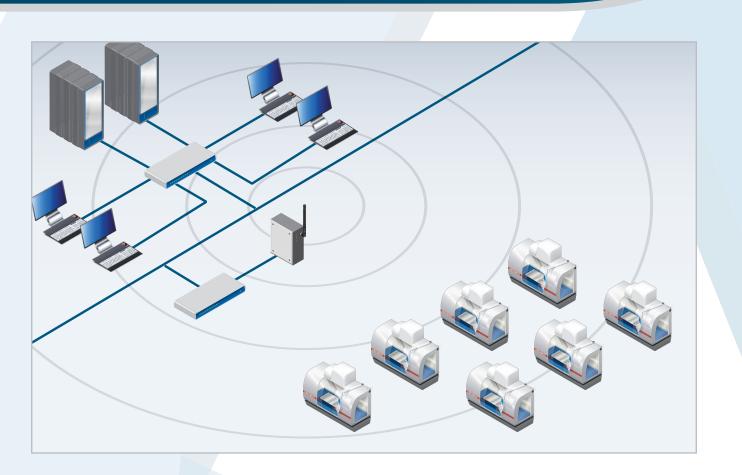

Competence in DNC Systems

To make the right choice it is important to choose not only the best available DNC solution but also a manufacturer with many years of experience to ensure reliable implementation and after-sales support.

Since 1991 CIMCO Integration has sold more than 100,000 DNC Systems through experienced DNC partners and consultants all over the world.

To meet the demands of customers who wish to replace their legacy wired and trouble-prone system - perhaps still set up with data switches - or to implement new solutions in workshops where CNCs are frequently relocated, CIMCO Integration offers DNC-Max Wireless as a turnkey wireless DNC system letting our well-known DNC-Max software connect to your CNC machines through a Wireless network.


DNC-Max Wireless means:

1. No data cabling is necessary, except for the short distance from the wireless DNC Device Server to the physical RS-232 CNC port here, traditional cable and connectors are used.

2. CNC machine tools may be relocated frequently, but they need not be rewired and usually not even reconfigured: identification (e.g. machine no.) and transmission parameters remain unchanged in the current DNC software set-up (.mch-files).

How The System Works

A patch cable between the Wireless DNC Access Point and an Ethernet switch connects your cabled and your wireless networks. At the other end, a Wireless DNC Device Server mounted on the CNC converts the received radio signals to RS-232. Line-of-sight distances of up to 100m are safely bridged, and the high data transfer rate of 22 Mbps guarantees serial data transmission with the highest baud rate for COM ports - 115,200 Bd.

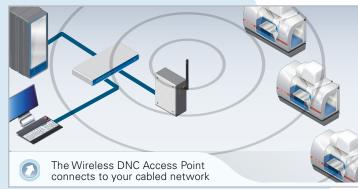


Even in workshops with strong electromagnetic interference wireless data transmission provides a high operational reliability thanks to the multiple checksum verification performed by the Ethernet TCP protocol. Data packets are simply re-transmitted until checksums match. To prevent unauthorized access to the NC data transmission WPA, Wi-Fi Protected Access, is integrated providing encryption with key lengths of up to 256 bits.

Wireless DNC Access Points

Wireless DNC Access Points are Ethernet hubs that convert the DNC Ethernet communications to wireless IEEE 802.11b(+) signals and vice versa, and are mounted to the network like any other wired Ethernet device (PC, hub, switch, router, etc.).

Wireless DNC Access Points transmit the NC data via a directional or an omni-directional antenna from/to a wired network to/from the Wireless DNC Device Server mounted on or near the CNC machine tools in the workshop.



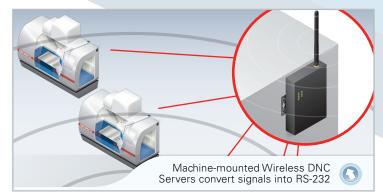







Wireless DNC Device Servers each connect to 1, 2, or 4 CNCs and receive/send the NC data from/to the nearest Wireless DNC Access Point via attached antennae. Received radio signals are converted into the RS-232 format, which is understood by the connected CNCs.

On the hardware side the adaptor output port will be connected to the CNC interface (DB-25/f, DB-9/m, DB-25/m) by a short, shielded data cable or, also possible, using fibre optics ensuring perfect galvanic insulation and insensibility to electrical noise. NC data sent from a CNC to be stored on the DNC server pass through the same connection.

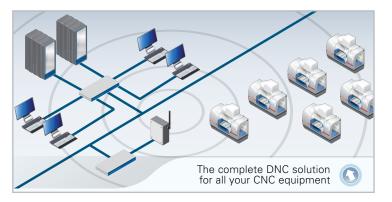



DNC-Max Network Solutions

Adding DNC-Max to your setup

Ethernet Serial Port Server



with Ethernet Serial Port Server

Ethernet Serial Port Server

Ethernet offers a significant improvement in reliability and maximum cable lengths over conventional RS-232 cabling. Not all existing equipment, however, offers Ethernet or TCP/IP connectivity, but with Serial Port Servers even older CNC machines become part of the network.

Reduce Shop Floor Cabling

The Ethernet Serial Port Server is similar in function to an RS-232 multiport card. Whereas a multiport card must be installed in your PC the Serial Port Server simply connects to the Ethernet network. This allows the use of existing Ethernet infrastructure and significantly reduces the amount of cabling on the shop floor.

Single Server Operation

Place the Serial Port Server in the shop close to machine controls or other equipment limited to RS-232 distances - and connect your server anywhere else on your network. Several hubs can be placed around your shop and all can be serviced by a single central DNC-Max server or by separate servers.

CIMCO DNC-Max supports


- Direct driver for Moxa and Quatech built in
- Auto-detecting 10/100 Mbps Ethernet interface
- Optional 3-in-1 interface supports RS-232/422/485
- Complete Ethernet and TCP/IP protocol
- Automatic network connection recovery





Single Server Solutions

Connections for transmission with DNC-Max can be established in proof fibre optic cables with optic to RS-232 interface, or combinaseveral ways. Depending on the extent and the environment of the tions with ethernet and wireless solutions using port servers and installation, as well as the flexibility desired, you may opt for access points. traditional RS-232 cabling directly between PC and CNC, noise



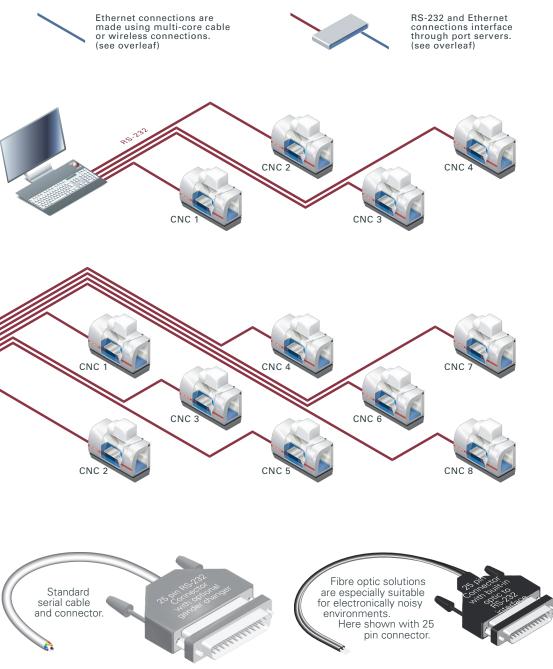

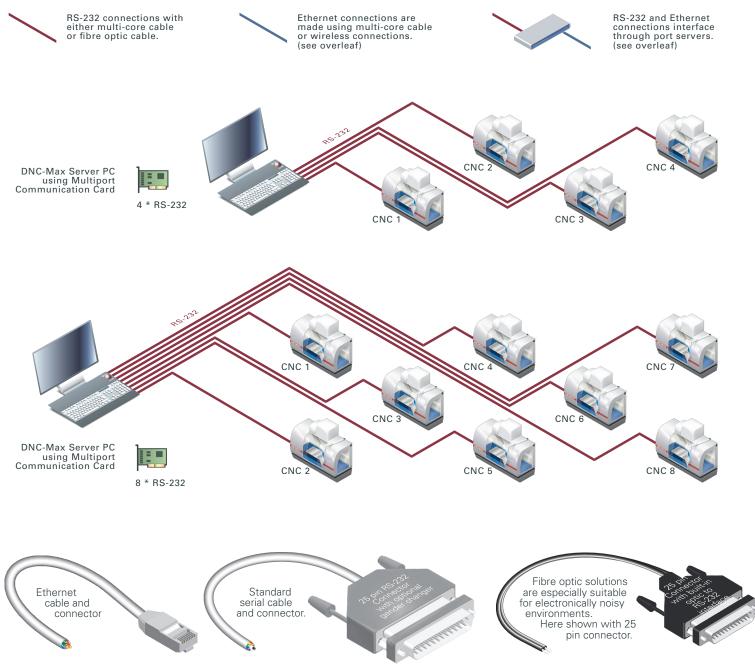

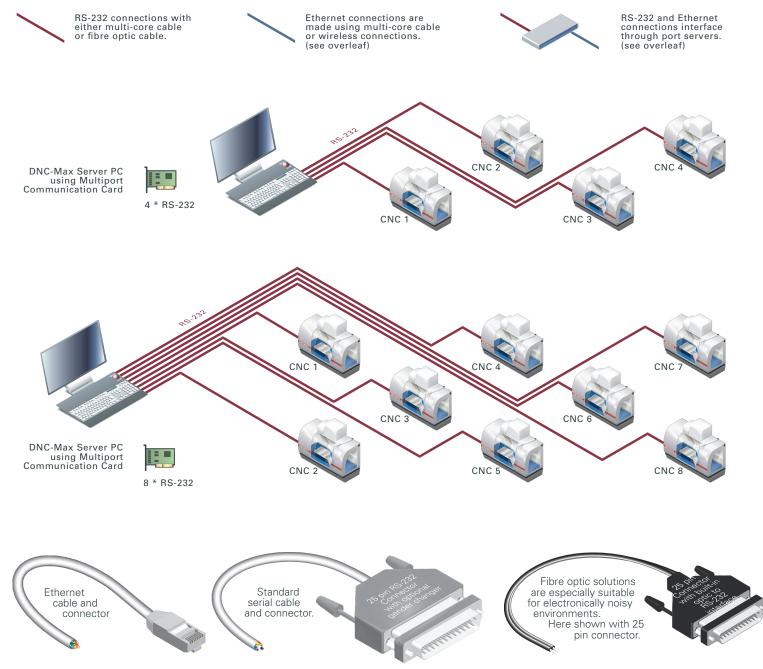

CIMCO MDC-Max Manufacturing Data Collection

Make informed decisions

CIMCO MDC-Max is a real-time software machine tool data collection system that gives you instant reports and charts about your shop floor productivity. MDC-Max makes your decisions easy as they will be based on accurate data collected from your machine tools.

In today's complex and competitive global markets, it is more important than ever to maximize effective use of manufacturing equipment. CIMCO MDC-Max provides powerful machine data collection and analysis capabilities to make this task easier and gives you real-time reports including Overall Equipment Effectiveness (OEE).

All of this can be achieved without having to place a PC next to each machine tool - all the data can be collected by cable, wireless, or ethernet (network) to be stored centrally, even if you have multiple workshops to monitor.

CIMCO MDC-Max integrates with the latest version of the most trusted CNC-Communication software on the market - CIMCO DNC-Max.

A truly integrated solution

CIMCO MDC-Max is fully integrated with CIMCO DNC-Max and CIMCO NC-Base giving you a complete DNC, document gathering, and Machine Data Collection system from one supplier.

CIMCO MDC-Max

MDC-Max is the software responsible for collecting all the machine tool data for in-cycle and number of parts produced.


CIMCO DNC-Max

DNC-Max controls the sending and receiving of CNC programs to your range of machine tools. Programs can be requested from the machine control, thus avoiding the operator having to leave his machine. Any program changed by the operator and sent back to DNC-Max can be automatically raised in version or stored in a quarantine area. This gives you the ability to track changes and revert to any previous version if necessary.

CIMCO NC-Base

The data collected by MDC-Max can be analysed immediately by the NC-Base module to produce graphs and charts showing you exactly what is happening with your production schedules.

NC-Base also allows you to store any documents related to a particular job. These can be drawings, photographs of machine setups, tool lists, operation sheets, CNC programs, etc. This makes finding any information about a particular job extremely easy.

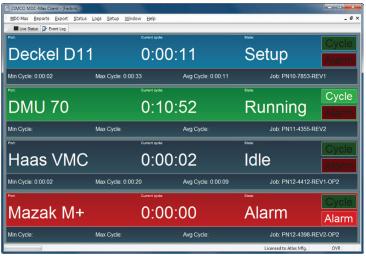


Realtime Machine Display


Reports and Graphs

With the build-in report functions you can easily display your data to enable you to explore down to the appropriate level to see exactly what is happening with your production schedules.

- Cycle Time per Part (min, max and average)
- Number of parts per shift / operator
- Number of scrapped parts
- Machine downtime
- Scheduled maintenance
- Unscheduled maintenance
- Setup Time per part
- Operator effectiveness
- Overall Equipment Effectiveness (OEE)
- Realtime Machine Display
- (see which machines are running at a glance)





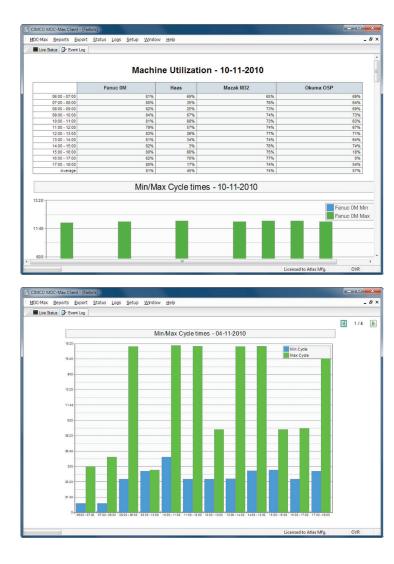



How MDC-Max works

On a typical installation we fit one of our MDC units into the machine control. This unit is wired into the Cycle Start and Parts Counter relays. Every time the machining cycle or the parts counter signal is detected by the MDC unit, a code is sent back to the MDC-Max software. Because of the variety of types of machine controls the monitored signals may vary depending on customers' requirements.

These codes are recorded in realtime on the computer system and can be displayed immediately in a graphical format.

If a machine is not in production for any reason the operator can scan a barcode to let the MDC-Max system know why the machine has stopped. These codes can be customised to suit your company, but typical barcodes would be for the following reasons:

- · Waiting for Setter
- Waiting for Maintenance
- · Waiting for Tooling
- Waiting for Material
- Waiting for ...

As MDC-Max records all this information you can then produce reports to see how much production time has been lost due to waiting for tooling, etc.

For more information visit www.cimco.com

CIMCO Integration was founded in 1991, and from the beginning we have been focused on providing software solutions and integration work in the area of Computer Integrated Manufacturing. Today, we develop and market a wide range of products, including CNC-Editors,

DNC-Servers, software for rapid NC-program simulation, and database applications for managing NC-programs. CIMCO Integration has sold more than 100,000 software licenses through experienced CAD/CAM/CNC resellers and consultants all over the world.



Reseller

Europe

CIMCO A/S Copenhagen Denmark

Tel: +45 45 85 60 50 Fax: +45 45 85 60 53 E-mail: info@cimco.com Web: www.cimco.com

CIMCO Americas

CIMCO Americas, LLC 651 S Sutton Road, Suite 276 Streamwood, IL 60107

Tel: +1 704 644 3587 Fax: +1 704 943 0514

E-mail: infous@cimco.com Web: www.cimco.com

